

Montageanleitung

Spotled mit flexiblem Arm

Mounting instructions

Flexible spotled

Instructions de montage

Spot LED a bras flexible

Monteringsanvisning

Flexibel spot-LED

Montagehandleiding

Flexibele spotled

Instrucciones de montaje

Foco LED flexible

Istruzioni di montaggio

Spotled flessibile

Asennusohje

Taipuisa spotled



Lieferumfang
Kit includes
Fourniture



Leveransomfattning
Inhoud set
Volumen del suministro

Dotazione di fornitura
Osaluettelo

2JA 343 720-07

2JA 343 720-08



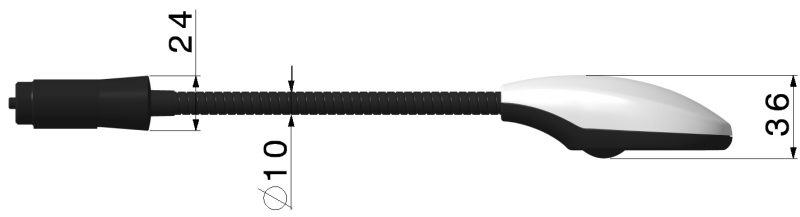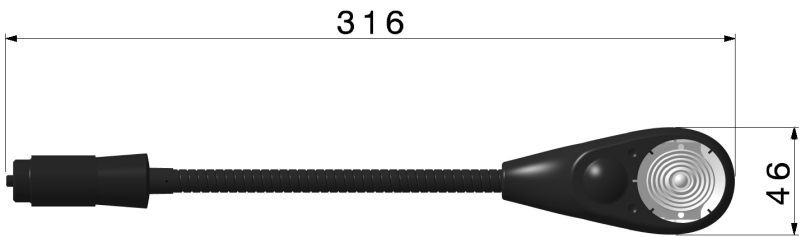

4



12/24 V

Technische Daten

Spotted mit flexiblem Arm

Art.-Nr.	2JA-	343 720-...
Eingangsspannung Stromverbrauch		9-32 V 3 W
Materialien		Gehäuse Oberteil: PC/ABS, Gehäuse Unterteil: PC/ABS, Lichtscheibe: PMMA, Kühlplatte: Aluminium, Knopf: TPE
IP Klasse		53

Technical Data

Flexible spotted

Part No	2JA-	343 720-...
Input voltage Power consumption		9-32 V 3 W
Materials		Housing upper part: PC/ABS, Housing lower part: PC/ABS, Lens: PMMA, Heat sink plate: Alumin., Push button: TPE
IP Class		53

Données Techniques

Spot LED a bras flexible

Référence	2JA-	343 720-...
Tension d'entrée Consommation		9-32 V 3 W
Matériaux		Boîtier cime: PC/ABS, Boîtier bas: PC/ABS, Voyant: PMMA, Élément réfrigérant: Aluminium, Bouton: TPE
Classe IP		53

Teknisk Information

Flexibel spot-LED

Artikelnr	2JA-	343 720-...
Inspänning Effektförbrukning	9-32 V 3 W	
Material	Kåpa övre: PC/ABS, Kåpa nedre: PC/ABS, Lins: PMMA, Kylelement: Aluminium, Tryckknapp: TPE	
IP klass	53	

Technische Gegevens

Flexibele spotled

Artikelnr.	2JA-	343 720-...
Ingångsspänning Opgenomen ver- mogen	9-32 V 3 W	
Materialien	Huis hoger: PC/ABS, Huis lager: PC/ABS, Lens: PMMA, Koelement: Aluminium, Kop: TPE	
IP Klasse	53	

Datos Técnicos

Foco LED flexible

Nºde artículo	2JA-	343 720-...
Tensión de entrada Consumo de cor- riente	9-32 V 3 W	
Materiales	Caja cima: PC/ABS, Caja fondo: PC/ABS, Lente: PMMA, Elemento refrigerador: Aluminium, Botón: TPE	
Clase IP	53	

Dati Tecnici

Spotted flessibile

N. art.	2JA-	343 720-...
Tensione di ingresso Assorbimento di potenza	9-32 V 3 W	
Materiali	Scatola cima: PC/ABS, Scatola fondo: PC/ABS, Lente: PMMA, Refrigerante: Aluminium, Bottone: TPE	
Classe IP	53	

Tekniset Tiedot

Taipuisa spotted

Tuotenro.	2JA-	343 720-...
Jännite Teho	9-32 V 3 W	
Materiaalit	Runko yläosa: PC/ABS, Runko alaosa: PC/ABS, Lasi: PMMA, Jäähdytyslevy: Alumiini, Painonappi: TPE	
IP Luokka	53	